

AD01 Heavy Duty Slides - Standard Type



Specifications

- **Length:** 250mm to 1000mm (10" to 39")
- **Travel:** Full Extension
- **Side Space:** 19.1mm (+0.5mm / -0mm)
- **Height:** 53mm (2.09")
- **Max. Loading:** 90 kg (200 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


Packing

- Unit Packed in 6 pairs/carton



Applications

- Wide Lateral File Drawers
- Large Storage Drawers
- Toolbox

Dimensional Specifications

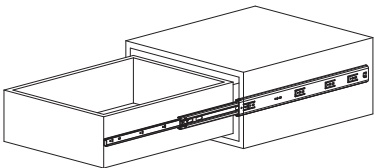

mm (inch)

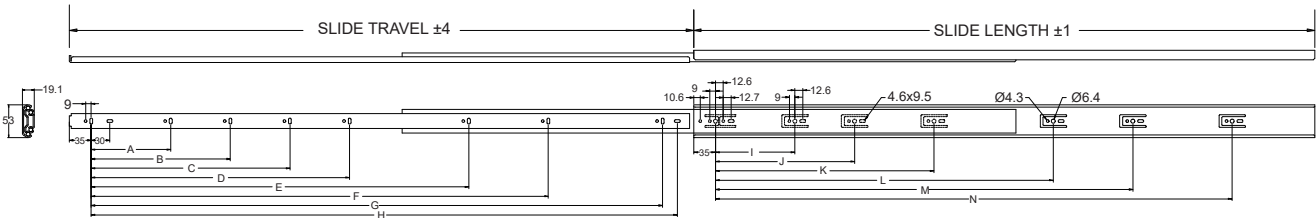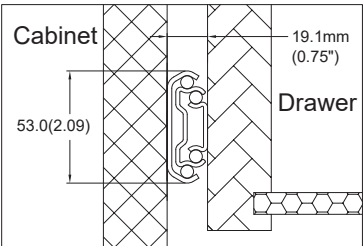

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)													
				A	B	C	D	E	F	G	H	I	J	K	L	M	N
AD01-250	250.0 (9.84)	256.0 (10.07)	46.0 (100.0)	96 (3.77)	—	—	—	—	—	—	181 (7.12)	160 (6.33)	—	—	—	—	—
AD01-300	300.0 (11.81)	306.0 (12.04)	54.0 (120.0)	128 (5.04)	220 (8.66)	—	—	—	—	—	—	192 (7.55)	—	—	—	—	—
AD01-350	350.0 (13.78)	356.0 (14.01)	68.0 (150.0)	128 (5.04)	270 (10.63)	—	—	—	—	—	—	224 (8.81)	—	—	—	—	—
AD01-400	400.0 (15.75)	406.0 (15.98)	80.0 (180.0)	128 (5.04)	320 (12.60)	—	—	—	—	—	—	224 (8.81)	320 (12.59)	—	—	—	—
AD01-450	450.0 (17.72)	456.0 (17.95)	90.0 (200.0)	128 (5.04)	320 (12.60)	370 (14.56)	—	—	—	—	—	224 (8.81)	352 (13.85)	—	—	—	—
AD01-500	500.0 (19.69)	506.0 (19.92)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	416 (16.38)	—	—	—	—	128 (5.03)	256 (10.07)	416 (16.37)	—	—	—
AD01-550	550.0 (21.65)	556.0 (21.88)	90.0 (200.0)	128 (5.04)	224 (8.82)	416 (16.38)	470 (18.50)	—	—	—	—	128 (5.03)	352 (13.85)	448 (17.63)	—	—	—
AD01-600	600.0 (23.62)	606.0 (23.85)	90.0 (200.0)	128 (5.04)	224 (8.82)	416 (16.38)	520 (20.47)	—	—	—	—	128 (5.03)	352 (13.85)	480 (18.89)	—	—	—
AD01-650	650.0 (25.59)	656.0 (25.85)	90.0 (200.0)	128 (5.04)	224 (8.82)	416 (16.38)	544 (21.42)	570 (22.44)	—	—	—	128 (5.03)	352 (13.85)	544 (21.41)	—	—	—
AD01-700	700.0 (27.55)	706.0 (27.79)	90.0 (200.0)	128 (5.04)	224 (8.82)	416 (16.38)	544 (21.42)	620 (24.41)	—	—	—	128 (5.03)	224 (8.81)	352 (13.85)	544 (21.41)	—	—
AD01-750	750.0 (29.52)	756.0 (29.76)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	544 (21.42)	670 (26.38)	—	—	—	128 (5.03)	224 (8.81)	384 (15.11)	544 (21.41)	—	—
AD01-800	800.0 (31.49)	812.0 (31.96)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	544 (21.42)	720 (28.35)	—	—	—	128 (5.03)	224 (8.81)	416 (16.37)	544 (21.41)	672 (26.45)	—
AD01-850	850.0 (33.46)	861.0 (33.89)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	544 (16.37)	672 (21.41)	770 (26.45)	—	—	128 (5.03)	224 (8.81)	448 (17.63)	576 (22.67)	704 (27.71)	—
AD01-900	900.0 (35.43)	911.0 (35.86)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	416 (16.37)	544 (21.41)	736 (28.97)	820 (32.28)	—	128 (5.03)	224 (8.81)	480 (18.89)	576 (22.67)	736 (28.97)	—
AD01-950	950.0 (37.40)	961.0 (37.83)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	416 (16.37)	608 (23.93)	736 (28.97)	870 (34.25)	—	128 (5.03)	224 (8.81)	352 (13.85)	544 (21.41)	672 (26.45)	800 (31.49)
AD01-1000	1000.0 (39.37)	1011.0 (39.80)	90.0 (200.0)	128 (5.04)	224 (8.82)	320 (12.60)	416 (16.37)	608 (23.93)	736 (28.97)	920 (36.22)	—	128 (5.03)	224 (8.81)	352 (13.85)	544 (21.41)	672 (26.45)	832 (32.75)

AE01 Heavy Duty Slides - Standard Type



Specifications

- **Length:** 250mm to 1000mm (10" to 28")
- **Travel:** Full Extension
- **Side Space:** 13.0mm (+0.5mm / -0.3mm)
- **Height:** 54mm (2.13")
- **Max. Loading:** 68 kg (150 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


Packing

- Unit Packed in 5 pairs/carton
- Bulk Packed in
30 pcs/carton for external slides
100pcs/carton for inner slides

Applications

- Wide Lateral File Drawers
- Large Storage Drawers
- Toolbox


Dimensional Specifications

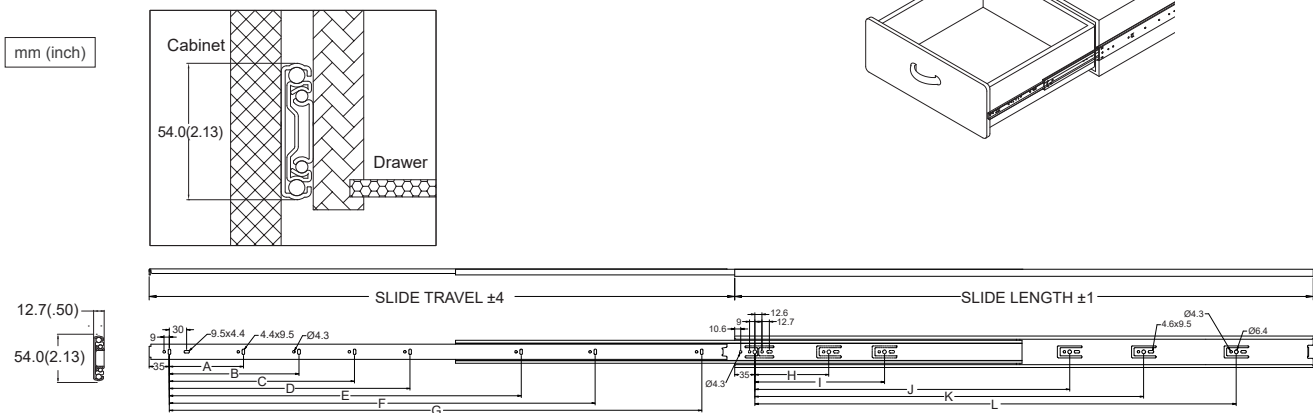

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)											
				A	B	C	D	E	F	G	H	I	J	K	L
AE01-250	250 (9.84)	240 (9.45)	46 (100)	181 (7.12)	—	—	—	—	—	—	160 (6.29)	—	—	—	—
AE01-300	300 (11.81)	307 (12.08)	54.5 (120)	96 (3.77)	220 (8.66)	—	—	—	—	—	128 (5.03)	224 (8.81)	—	—	—
AE01-350	350 (13.78)	357 (14.05)	54.5 (120)	128 (5.03)	238 (9.37)	—	—	—	—	—	160 (6.29)	224 (8.81)	—	—	—
AE01-400	400 (15.75)	407 (16.02)	63.6 (140)	128 (5.03)	320 (12.59)	—	—	—	—	—	224 (8.81)	320 (12.59)	—	—	—
AE01-450	450 (17.72)	457 (17.99)	68.0 (150)	128 (5.03)	320 (12.59)	370 (14.56)	—	—	—	—	224 (8.81)	352 (13.85)	—	—	—
AE01-500	500 (19.69)	511 (20.11)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	—	—	—	224 (8.81)	416 (16.37)	—	—	—
AE01-550	550 (21.65)	557 (21.92)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	470 (18.50)	—	—	—	256 (10.07)	352 (13.85)	448 (17.63)	—	—
AE01-600	600 (23.62)	607 (23.89)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	520 (20.47)	—	—	—	128 (5.03)	352 (13.85)	480 (18.89)	—	—
AE01-650	650 (25.59)	657 (25.86)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	576 (22.67)	—	—	—	128 (5.03)	352 (13.85)	544 (21.41)	—	—
AE01-700	700 (27.56)	707 (27.83)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	544 (21.41)	620 (24.40)	—	—	128 (5.03)	352 (13.85)	544 (21.41)	—	—
AE01-750	750 (29.52)	757 (29.80)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	544 (21.41)	670 (26.37)	—	—	128 (5.03)	352 (13.85)	544 (21.41)	672 (26.45)	—
AE01-800	800 (31.49)	812 (31.96)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	544 (21.41)	720 (28.34)	—	—	128 (5.03)	224 (8.81)	384 (15.11)	544 (21.41)	672 (26.45)
AE01-850	850 (33.46)	862 (33.93)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	544 (21.41)	672 (26.45)	768 (30.23)	—	128 (5.03)	224 (8.81)	448 (17.63)	576 (22.67)	704 (27.71)
AE01-900	900 (35.43)	912 (35.90)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	544 (21.41)	736 (28.97)	820 (32.28)	128 (5.03)	224 (8.81)	448 (17.63)	576 (22.67)	736 (28.97)
AE01-950	950 (37.40)	962 (37.87)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	608 (23.93)	736 (28.97)	870 (34.25)	128 (5.03)	224 (8.81)	512 (20.15)	672 (26.45)	800 (31.49)
AE01-1000	1000 (39.37)	1012 (39.84)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	608 (23.93)	736 (28.97)	920 (36.22)	128 (5.03)	224 (8.81)	544 (21.41)	672 (26.45)	832 (32.75)

3M01 Ball Bearing Slides -Standard Type

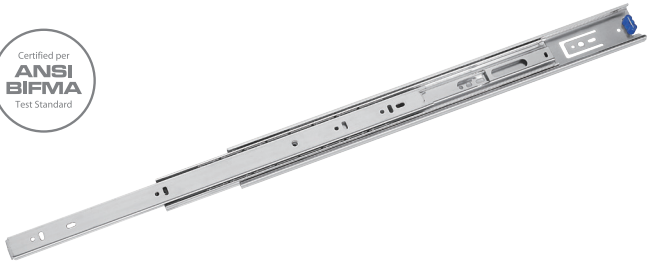

Specifications

- **Length:** 250mm to 1000mm (10" to 40")
- **Profile:** 45.6mm x 12.7mm
- **Travel:** Full Extension
- **Side Space:** 13mm (+0.5mm-0.3mm)
- **Height:** 45.6mm (1.80")
- **Max. Loading:** 45 kg (100 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


Packing

- Unit Packed in 15 pairs/carton
- Bulk Packed in 40 pcs/carton for external slides 100 pcs/carton for inner slides

Applications

- Kitchen Furniture
- Home Cabinets
- Box Drawers
- Desk, Storage and File Drawers

Dimensional Specifications

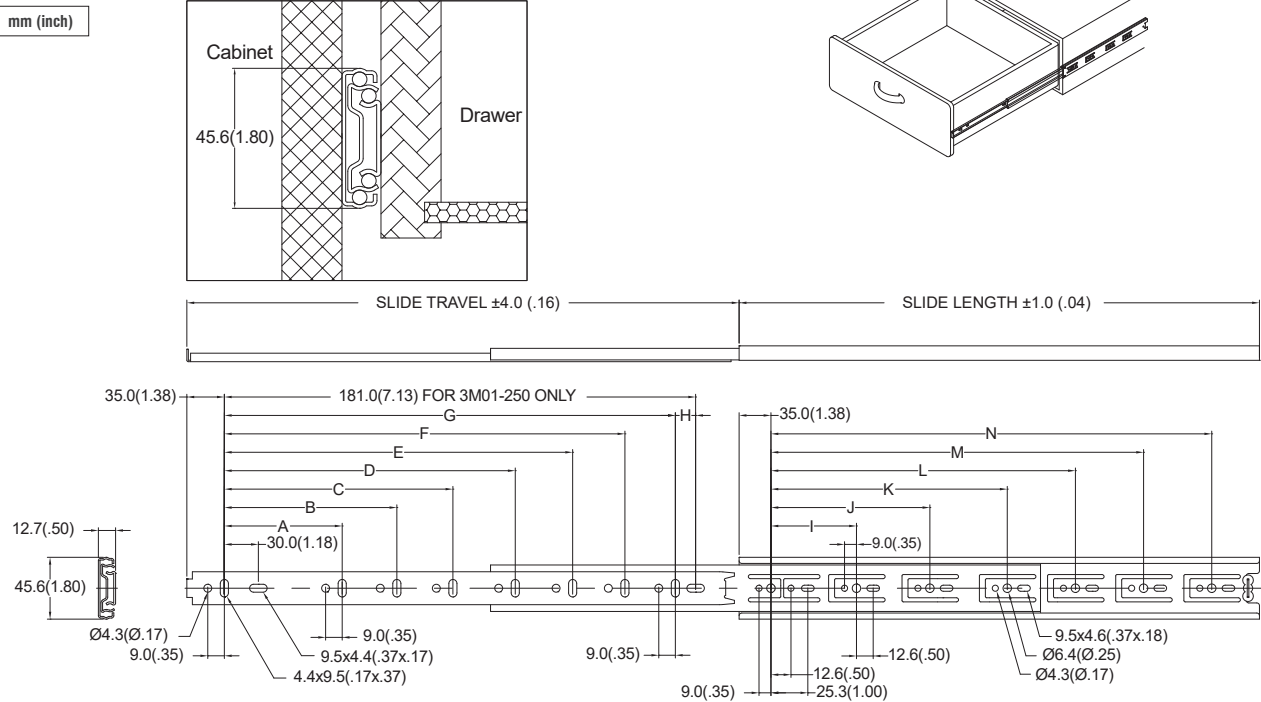

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)													
				A	B	C	D	E	F	G	H	I	J	K	L	M	N
3M01-250	250.0 (9.84)	256.7 (10.11)	22.7 (50.0)	96.0 (3.78)	—	—	—	—	—	—	—	—	—	—	—	—	160.0 (6.30)
3M01-300	300.0 (11.81)	306.7 (12.07)	27.3 (60.0)	128.0 (5.04)	—	—	—	—	—	220.0 (8.66)	11.0 (0.43)	128.0 (5.04)	—	—	—	—	224.0 (8.82)
3M01-350	350.0 (13.78)	356.7 (14.04)	34.1 (75.0)	128.0 (5.04)	—	—	—	—	—	270.0 (10.63)	11.0 (0.43)	128.0 (5.04)	—	—	—	—	224.0 (8.82)
3M01-400	400.0 (15.75)	406.7 (16.01)	45.4 (100.0)	128.0 (5.04)	—	—	—	—	—	320.0 (12.60)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	320.0 (12.60)
3M01-450	450.0 (17.72)	456.7 (17.98)	45.4 (100.0)	128.0 (5.04)	320.0 (12.60)	—	—	—	—	370.0 (14.57)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	352.0 (13.86)
3M01-500	500.0 (19.69)	506.7 (19.95)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	—	—	—	416.0 (16.38)	15.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	416.0 (16.38)
3M01-550	550.0 (21.65)	556.7 (21.92)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	—	—	470.0 (18.53)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	448.0 (17.64)
3M01-600	600.0 (23.62)	606.7 (23.89)	38.6 (85.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	—	—	520.0 (20.47)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	480.0 (18.90)
3M01-650	650.0 (25.59)	656.7 (25.85)	31.8 (70.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	—	—	570.0 (22.44)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-700	700.0 (27.56)	706.7 (27.82)	27.2 (60.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	—	—	620.0 (24.41)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-750	750.0 (29.53)	756.7 (29.79)	21.8 (48.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	544.0 (21.42)	—	—	670.0 (26.38)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-800	800.0 (31.50)	806.7 (31.76)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	544.0 (21.42)	—	—	720.0 (28.35)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	672.0 (26.46)
3M01-850	850.0 (33.46)	856.7 (33.73)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	770.0 (30.31)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-900	900.0 (35.43)	906.7 (35.70)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	820.0 (32.28)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-950	950.0 (37.40)	956.7 (37.67)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	870.0 (34.25)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-1000	1000.0 (39.37)	1006.7 (39.63)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	832.0 (32.76)	920.0 (36.24)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	736.0 (28.98)	864.0 (34.02)

3M51A Ball Bearing Slides –Silent / Self-Closing



Standard Ball Bearing Slides

Specifications

- **Length:** 250mm to 700mm (10" to 28")
- **Travel:** Full Extension
- **Side Space:** 13.0mm (+0.5mm / -0.3mm)
- **Height:** 45.6mm (1.80")
- **Max. Loading:** 45 kg (100 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel
- **Features:** Silent / Self-Closing


Packing

- Unit Packed in 15 pairs/carton
- Bulk Packed in
40 pcs/carton for external slides
100 pcs/carton for inner slides

Applications

- Home and Office Cabinets
- Box Drawers
- Desk, Storage and File Drawers

Dimensional Specifications

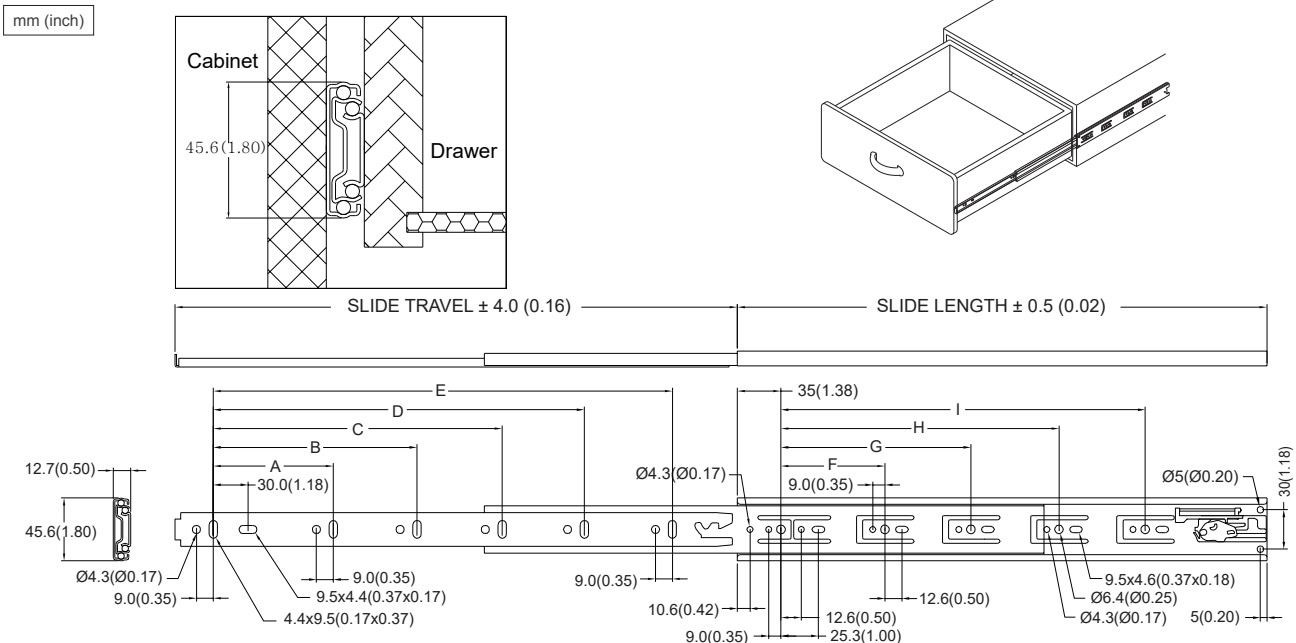

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)								
				A	B	C	D	E	F	G	H	I
3M51A-250	250.0 (9.84)	228.7 (9.00)	22.7 (50.0)	—	—	—	—	170.0 (6.69)	—	—	—	128.0 (5.04)
3M51A-300	300.0 (11.81)	304.7 (11.99)	27.3 (60.0)	128.0 (5.04)	—	—	—	220.0 (8.66)	—	—	—	160.0 (6.30)
3M51A-350	350.0 (13.78)	354.7 (13.96)	34.1 (75.0)	128.0 (5.04)	—	—	—	270.0 (10.63)	128.0 (5.04)	—	—	224.0 (8.82)
3M51A-400	400.0 (15.75)	404.7 (15.93)	40.8 (90.0)	128.0 (5.04)	—	—	—	320.0 (12.60)	128.0 (5.04)	—	—	288.0 (11.34)
3M51A-450	450.0 (17.72)	454.7 (17.90)	45.4 (100.0)	128.0 (5.04)	320.0 (12.60)	—	—	370.0 (14.57)	128.0 (5.04)	224.0 (8.82)	—	320.0 (12.60)
3M51A-500	500.0 (19.69)	504.7 (19.87)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	—	416.0 (16.38)	128.0 (5.04)	224.0 (8.82)	—	352.0 (13.86)
3M51A-550	550.0 (21.65)	554.7 (21.84)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	470.0 (18.53)	128.0 (5.04)	224.0 (8.82)	—	416.0 (16.38)
3M51A-600	600.0 (23.62)	604.7 (23.81)	38.6 (85.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	520.0 (20.47)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	480.0 (18.90)
3M51A-650	650.0 (25.59)	654.7 (25.77)	31.8 (70.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	570.0 (22.44)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	512.0 (20.16)
3M51A-700	700.0 (27.56)	704.7 (27.74)	27.2 (60.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	620.0 (24.41)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)

3J51

Ball Bearing Slide
–Self-Closing



Specifications

- **Length:** 250mm to 700mm (9.84" to 27.56")
- **Travel:** Full Extension
- **Side Space:** 13.0mm (+0.5mm / -0.3mm)
- **Height:** 37.2mm (1.46")
- **Max. Loading:** 34.5 kg (75 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel
- **Features:** Silent / Self-Closing

Packing


- Unit Packed in 10pairs/carton
- Bulk Packed in 40 pcs/carton for external slides 100 pcs/carton for inner slides

Applications

- Home and Office Cabinets
- Box Drawers
- Desk, Storage and File Drawers

Dimensional Specifications

mm (inch)

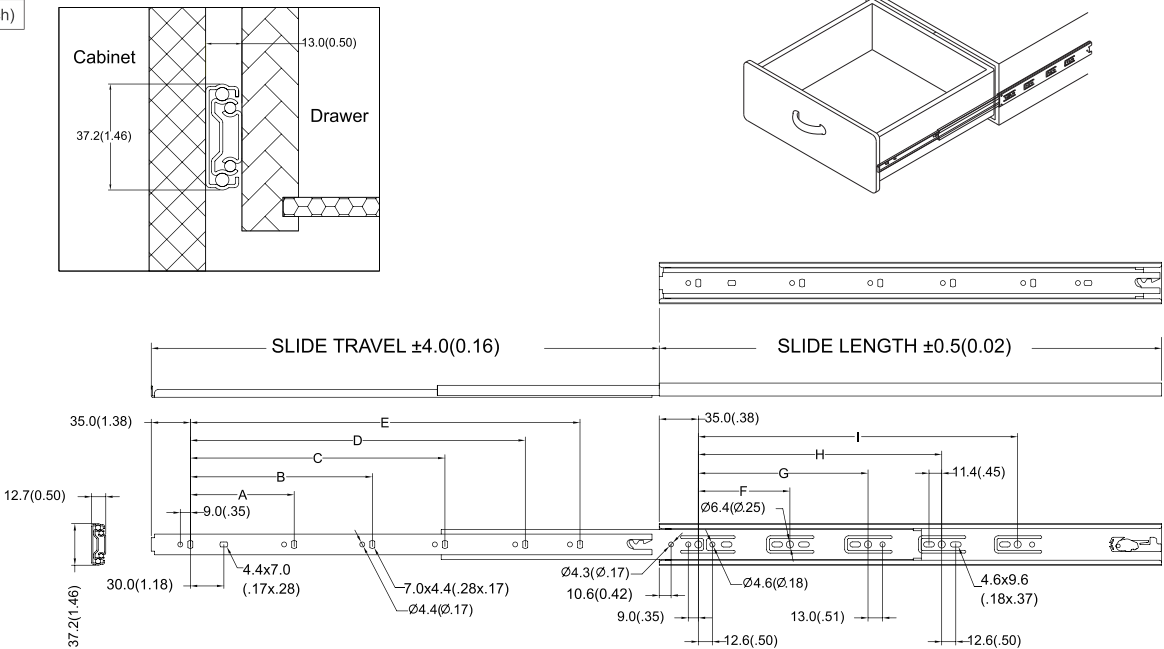

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)								
				A	B	C	D	E	F	G	H	I
3J51-250	250.0 (9.84)	245.0 (9.65)	17.5 (38.0)	170.0(6.70)	—	—	—	—	128.0 (5.04)	—	—	—
3J51-300	300.0 (11.81)	305.0 (12.01)	20.7 (45.0)	78.0(3.07)	220.0 (8.66)	—	—	—	160.0 (6.30)	—	—	—
3J51-350	350.0 (13.78)	355.0 (13.98)	25.7 (56.0)	128.0 (5.04)	270.0 (10.63)	—	—	—	128.0 (5.04)	224.0 (8.82)	—	—
3J51-400	400.0 (15.75)	405.0 (15.94)	34.5 (75.0)	128.0 (5.04)	320.0 (12.60)	—	—	—	128.0 (5.04)	288.0 (11.34)	—	—
3J51-450	450.0 (17.72)	455.0 (17.91)	34.5 (75.0)	128.0 (5.04)	320.0 (12.60)	370.0 (14.57)	—	—	128.0 (5.04)	224.0 (8.82)	320.0(12.60)	—
3J51-500	500.0 (19.69)	505.0 (19.88)	34.5 (75.0)	128.0 (5.04)	320.0 (12.60)	416.0 (16.38)	—	—	128.0 (5.04)	224.0 (8.82)	352.0(13.86)	—
3J51-550	550.0 (21.65)	555.0 (21.85)	34.5 (75.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	470.0(18.50)	—	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—
3J51-600	600.0 (23.62)	605.0 (23.82)	29.5 (64.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	520.0(20.47)	—	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	480.0 (18.90)
3J51-650	650.0 (25.59)	655.0 (25.79)	24.4 (53.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	570.0 (22.44)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	512.0 (20.16)
3J51-700	700.0 (27.56)	705.0 (27.76)	23.0 (50.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	620.0 (24.41)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)

3J01 Full Extension Ball Bearing Slide



Standard Ball Bearing Slides

Specifications

- **Length:** 250mm to 650mm (10" to 26")
- **Travel:** Full Extension
- **Side Space:** 13.0mm (+0.5mm / -0.3mm)
- **Height:** 37.2mm (1.46")
- **Max. Loading:** 34 kg (75 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


Packing

- Unit Packed in 16 pairs/carton
- Bulk Packed in
40 pcs/carton for external slides
100 pcs/carton for inner slides

Applications

- Home Cabinets
- Box Drawers
- Desk, Storage and File Drawers

Dimensional Specifications

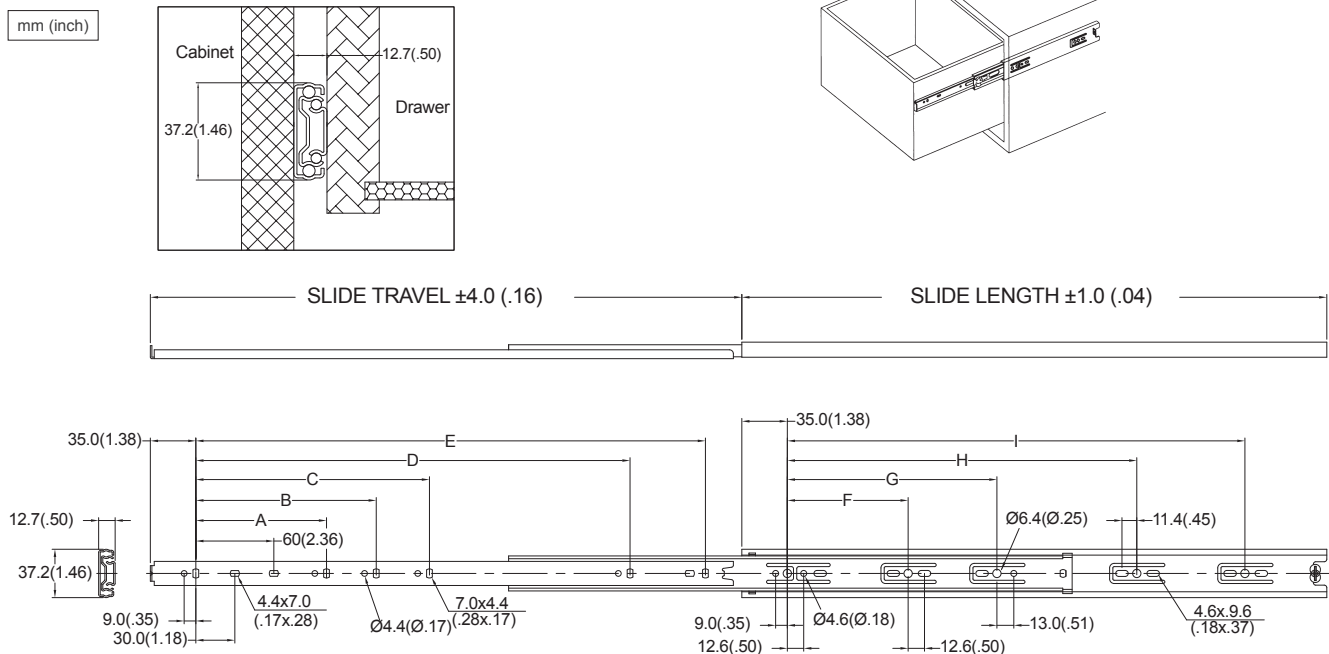

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)								
				A	B	C	D	E	F	G	H	I
3J01-250	250.0 (9.84)	255.0 (10.04)	17.5 (38.0)	—	—	—	—	192.0 (7.56)	160.0 (6.30)	—	—	—
3J01-300	300.0 (11.81)	315.0 (12.32)	20.7 (45.0)	128.0 (5.04)	—	—	—	242.0 (9.53)	128.0 (5.04)	224.0 (8.82)	—	—
3J01-350	350.0 (13.78)	365.0 (14.30)	25.7 (56.0)	128.0 (5.04)	—	—	—	292.0 (11.50)	128.0 (5.04)	224.0 (8.82)	—	—
3J01-400	400.0 (15.75)	405.0 (15.94)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	—	342.0 (13.46)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	—
3J01-450	450.0 (17.72)	455.0 (17.91)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	—	392.0 (15.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—
3J01-500	500.0 (19.69)	505.0 (19.88)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	416.0 (16.38)	442.0 (17.40)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—
3J01-550	550.0 (21.65)	555.0 (21.85)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	416.0 (16.38)	492.0 (19.37)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	448.0 (17.64)
3J01-600	600.0 (23.62)	605.0 (23.82)	29.5 (64.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	542.0 (21.34)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	480.0 (18.90)
3J01-650	650.0 (25.59)	655.0 (25.79)	24.4 (53.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	592.0 (23.31)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)

3J01B

Ball Bearing Slide
with 10 lbs Detent Force



Specifications

- **Length:** 250mm to 700mm (9.8" to 27.5")
- **Travel:** Full Extension
- **Side Space:** 13.0mm (+0.5mm-0.3mm)
- **Height:** 37.2mm (1.46")
- **Max. Loading:** 34.5 kg (75 lb)/pair
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel
- **Features:** Enhanced detent pulling force to prevent drawers from sliding out in vibrational environment


Packing

- Unit Packed in 16 pairs/carton
- Bulk Packed in 40 pcs/carton for external slides 100 pcs/carton for inner slides

Applications

- For Face Framed or Frameless Cabinets: Recreational Vehicle, Yacht Furniture, Medical Equipment, Office Furniture and Box Drawers

Dimensional Specifications

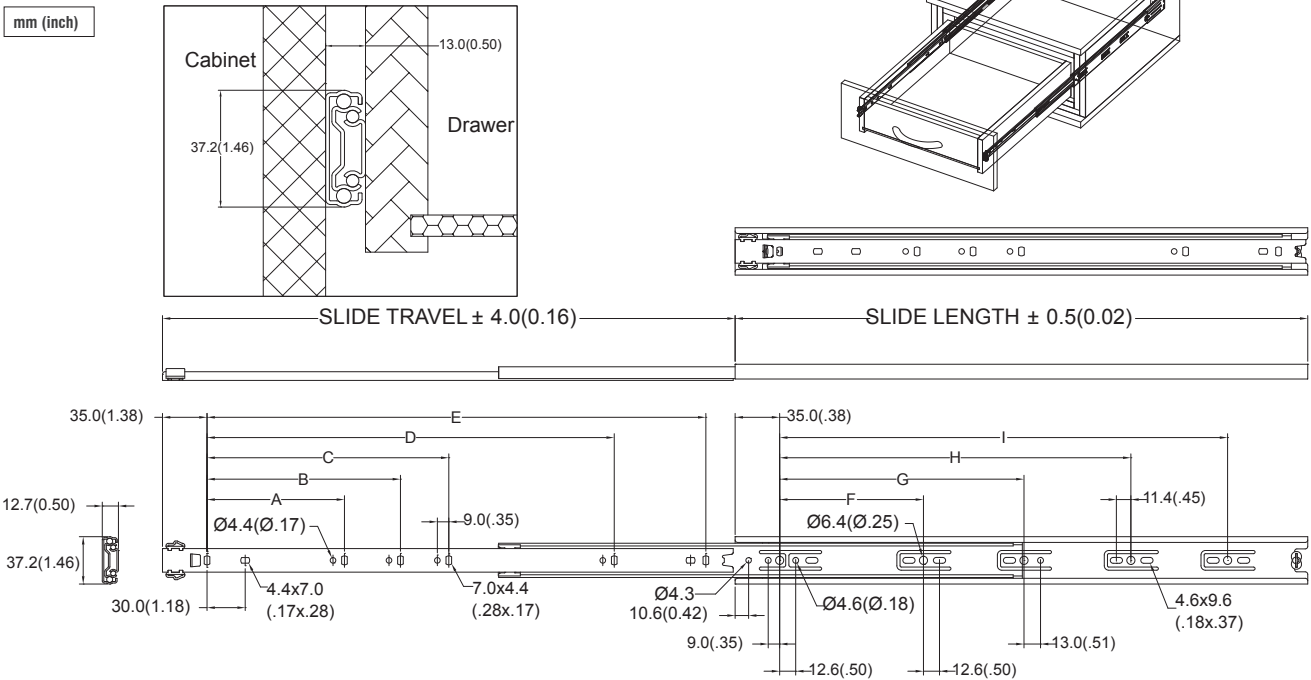

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)								
				A	B	C	D	E	F	G	H	I
3J01B-250	250.0 (9.84)	230.0 (9.06)	17.5 (38.0)	—	—	—	—	192.0 (7.56)	160.0 (6.30)	—	—	—
3J01B-300	300.0 (11.81)	300.0 (11.81)	20.7 (45.0)	—	—	—	—	242.0 (9.53)	128.0 (5.04)	224.0 (8.82)	—	—
3J01B-350	350.0 (13.78)	350.0 (13.78)	25.7 (56.0)	128.0 (5.04)	—	—	—	292.0 (11.50)	128.0 (5.04)	224.0 (8.82)	—	—
3J01B-400	400.0 (15.75)	400.0 (15.75)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	—	342.0 (13.46)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	—
3J01B-450	450.0 (17.72)	450.0 (17.72)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	—	392.0 (15.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—
3J01B-500	500.0 (19.69)	500.0 (19.69)	34.5 (75.0)	128.0 (5.04)	—	320.0 (12.60)	416.0 (16.38)	442.0 (17.40)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—
3J01B-550	550.0 (21.65)	550.0 (21.65)	34.5 (75.0)	128.0 (5.04)	224.0 (8.82)	—	416.0 (16.38)	492.0 (19.37)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	448.0 (17.64)
3J01B-600	600.0 (23.62)	600.0 (23.62)	29.5 (64.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	542.0 (21.34)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	480.0 (18.90)
3J01B-650	650.0 (25.59)	650.0 (25.59)	24.4 (53.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	592.0 (23.31)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)
3J01B-700	700.0 (27.56)	700.0 (27.56)	23.0 (50.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	642.0 (25.28)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)

3602

3/4 Extension Light Duty Slide-Standard Type



Specifications

- **Length:** 300mm to 650mm (12" to 26")
- **Profile:** 35mm x 12.7mm
- **Travel:** 3/4 Extension
- **Side Space:** 12.7mm (+0.5mm-0mm)
- **Height:** 35mm (1.38")
- **Max. Loading:** 25 kg (55 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


Packing

- Unit Packed in 20 pairs/carton
- Bulk Packed in
40 pcs/carton for external slides
80 pcs/carton for inner slides

Applications

- Home Cabinets
- Box Drawers
- Desk, Storage and File Drawers

Dimensional Specifications

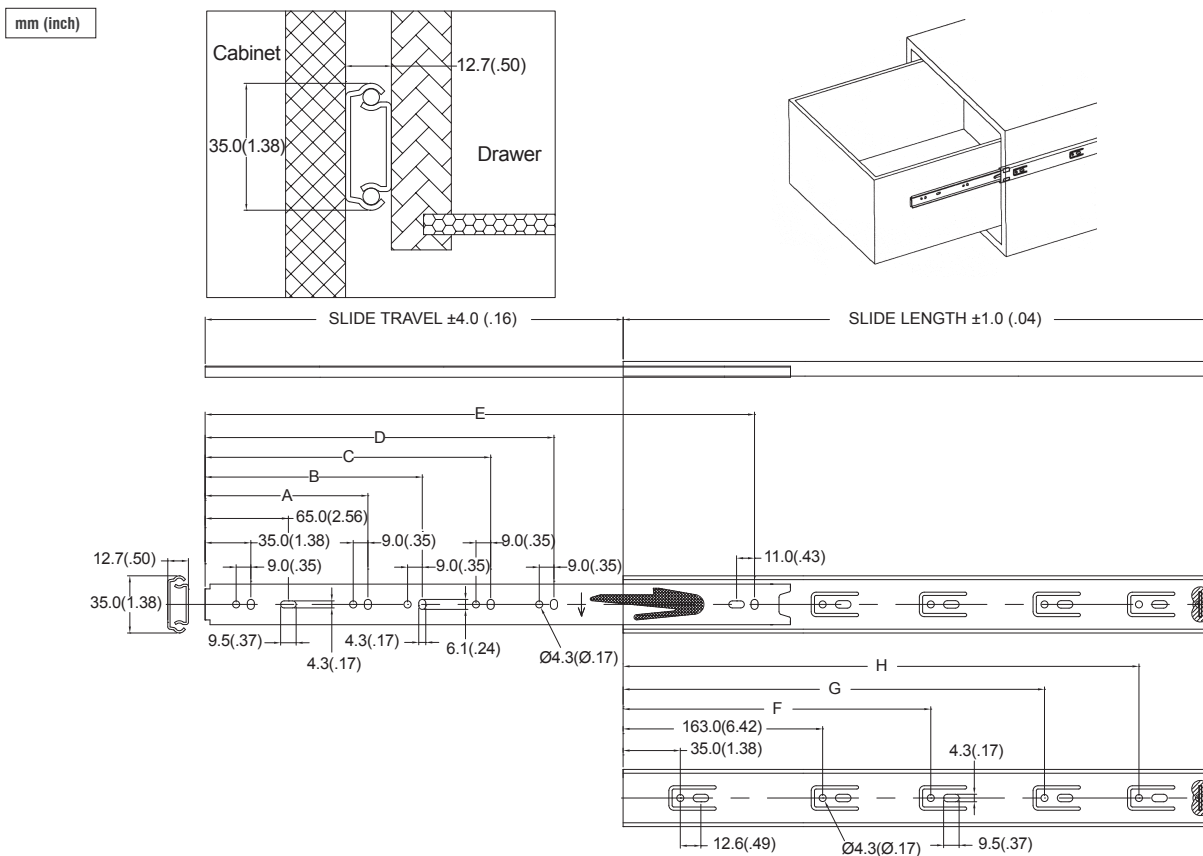


Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)							
				A	B	C	D	E	F	G	H
3602-300	300.0 (11.81)	203.0 (7.87)	25.0 (55.0)	131.0 (5.16)	—	277.0 (10.91)	—	—	259.0 (10.20)	—	—
3602-350	350.0 (13.78)	253.0 (9.84)	25.0 (55.0)	131.0 (5.16)	—	327.0 (12.87)	—	—	291.0 (11.46)	—	—
3602-400	400.0 (15.75)	303.0 (11.81)	22.0 (50.0)	131.0 (5.16)	—	277.0 (8.94)	377.0 (14.84)	—	259.0 (10.20)	323.0 (12.72)	—
3602-450	450.0 (17.72)	353.0 (13.78)	22.0 (50.0)	131.0 (5.16)	—	291.0 (11.46)	427.0 (16.81)	—	259.0 (10.20)	387.0 (15.24)	—
3602-500	500.0 (19.69)	383.0 (14.96)	22.0 (50.0)	131.0 (5.16)	—	259.0 (10.20)	323.0 (12.72)	477.0 (18.78)	259.0 (10.20)	419.0 (16.50)	—
3602-550	550.0 (21.65)	423.0 (16.54)	20.0 (45.0)	—	163.0 (6.42)	259.0 (10.20)	355.0 (13.98)	527.0 (20.75)	259.0 (10.20)	355.0 (13.98)	483.0 (19.02)
3602-600	600.0 (23.62)	448.0 (17.52)	18.0 (40.0)	—	163.0 (6.42)	259.0 (10.20)	355.0 (13.98)	577.0 (22.72)	259.0 (10.20)	387.0 (15.24)	515.0 (20.28)
3602-650	650.0 (25.59)	478.0 (18.70)	18.0 (40.0)	—	163.0 (6.42)	259.0 (10.20)	355.0 (13.98)	627.0 (24.69)	259.0 (10.20)	387.0 (15.24)	579.0 (22.80)

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

3517

Flipper Door Slides
-P Type

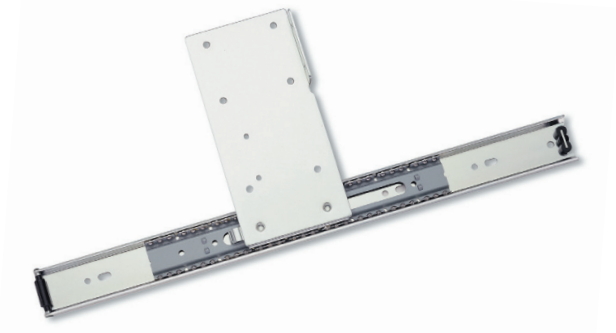

Specifications

- **Length:** 300mm to 700mm (12" to 28")
- **Profile:** 35mm x 9.7mm
- **Max. Loading Weight:** 7-13kg
- **Max. Door Height:** 1000mm
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


Packing

- Unit Packed in 10 pairs/ carton
- Bulk Packed in
14 pcs/carton for left member
14 pcs/carton for right member

Applications

- TV / Entertainment Cabinets
- Home and Office Storage Cabinets

Dimensional Specifications

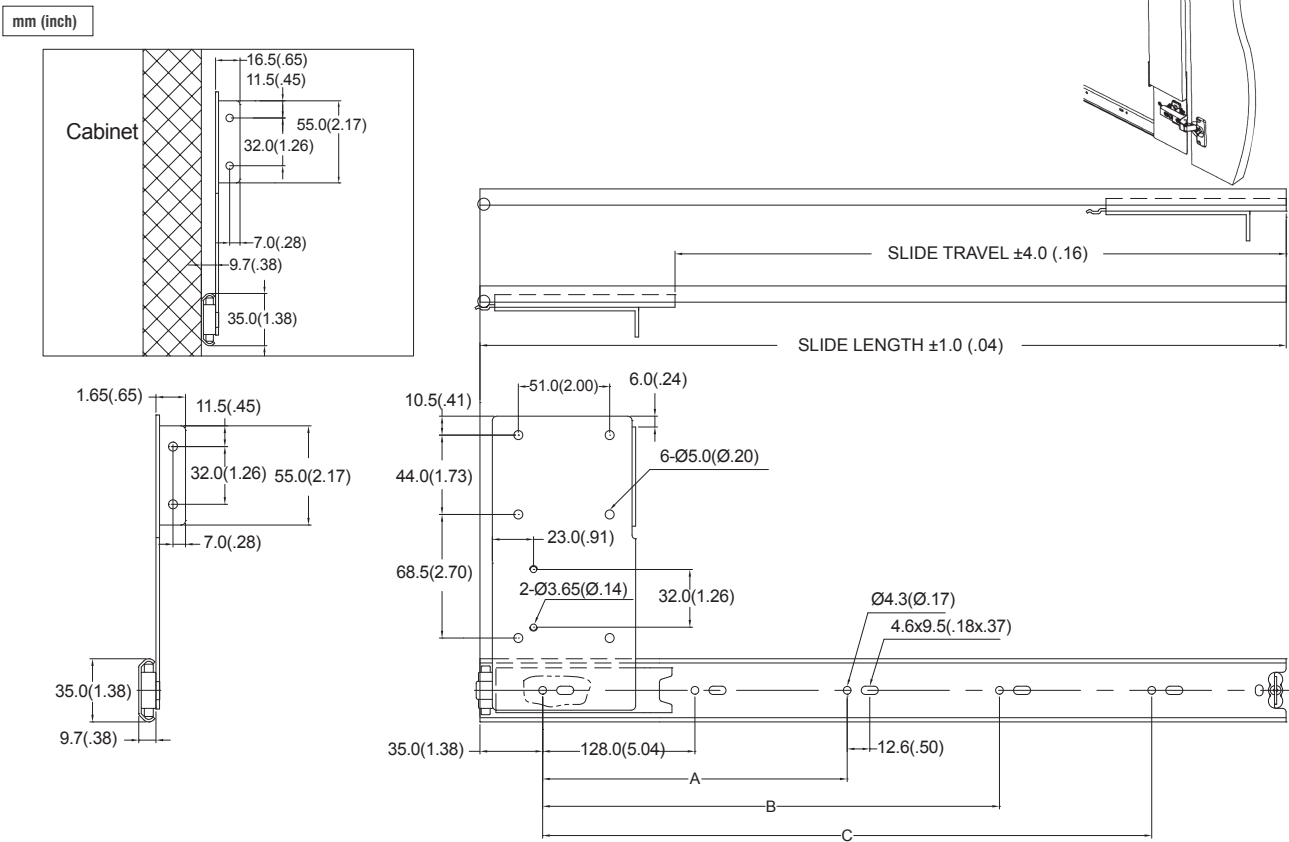

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Hole Positions mm (inch)		
			A	B	C
3517-300	300.0 (11.81)	217.0 (8.54)	—	—	224.0 (8.82)
3517-350	350.0 (13.78)	267.0 (10.51)	—	—	256.0 (10.08)
3517-400	400.0 (15.75)	317.0 (12.48)	224.0 (8.82)	—	292.0 (11.50)
3517-450	450.0 (17.72)	342.0 (13.46)	224.0 (8.82)	—	352.0 (13.86)
3517-500	500.0 (19.69)	392.0 (15.43)	224.0 (8.82)	—	384.0 (15.12)
3517-550	550.0 (21.65)	442.0 (17.40)	224.0 (8.82)	320.0 (12.60)	448.0 (17.64)
3517-600	600.0 (23.62)	492.0 (19.37)	224.0 (8.82)	352.0 (13.86)	480.0 (18.90)
3517-700	700.0 (27.56)	592.0 (23.31)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)