NEW

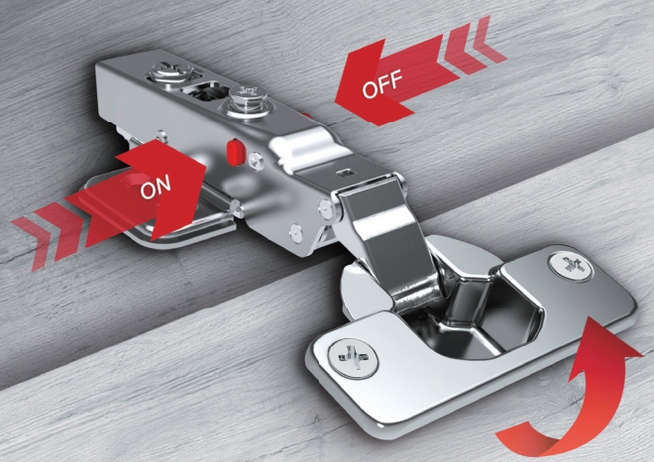

9252

Adjustable Concealed Soft-Close Hinge

Specifications

- **Cup Diameter:** 35mm
- **Cup Depth:** 13mm
- **Opening:** 105°
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 18mm, 9mm, 0mm
- **Door Thickness:** 16~22mm



Deactivate Soft-Close Function
Press OFF button and close the door to reset.



Activate Soft-Close Function
Press ON button to activate soft close function.

Assembly and Adjustments

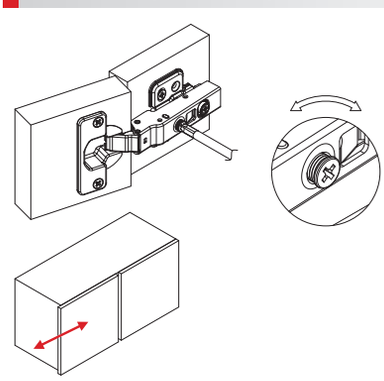

Side adjustment L 0.5mm
R 3.5mm

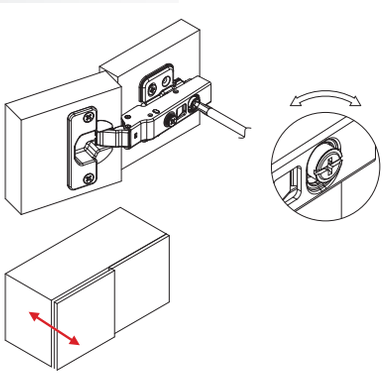

Depth adjustment In 2.25mm
Out 2.25mm

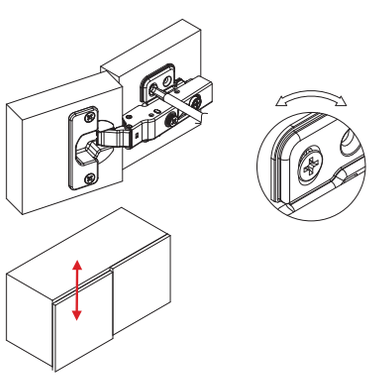

Height adjustment Up 2.0mm
Down 2.0mm

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

Model	Spec.		Screws		Knock-in Dowels	
						
Overlay	Spec	Figure	Hole Pattern	Model No.	Hole Pattern	Model No.
18mm			52mm	9252-0121-NZH	52mm	9252-0131-NZH
			45mm	9252-0221- NZH	45mm	9252-0231-NZH
9mm			52mm	9252-0122-NZH	52mm	9252-0132-NZH
			45mm	9252-0222-NZH	45mm	9252-0232-NZH
0mm			52mm	9252-0123-NZH	52mm	9252-0133-NZH
			45mm	9252-0223-NZH	45mm	9252-0233-NZH

Number of Hinges Per Door

The number of hinges depends on the door weight.
The dimensions can be referred to the figures in the following table.
The maximum width and thickness of the door are 600mm and 22mm.

Hinge Q'ty	2	3	4	5
Load Capacity	<6.3kg (14lbs)	6.3~11kgs (14~24lbs)	11~14.4kg (24~32lbs)	14.4~18kg (32~40lbs)



Drilling Pattern

Unit: mm



Screws



Knock-in Dowel

Base Plates for Hinges

Spec.		Material	Finish	Model No.
 		Steel	Nickel-plated	207
  		Steel / Plastic	Nickel-plated	208
 		Steel	Nickel-plated	212

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9256

Concealed Soft-Close Hinge for Thick Door

Specifications

- **Cup Diameter:** 40mm
- **Cup Depth:** 13.5mm
- **Opening:** 95°
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 18mm, 9mm, 0mm
- **Door Thickness:** 16～30mm

Assembly and Adjustments

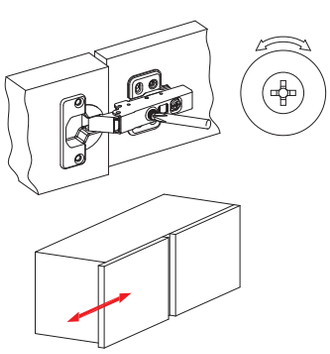

Side adjustment L 0mm
R 2.5mm

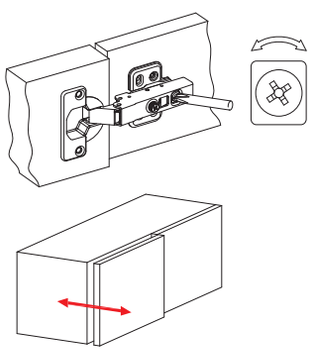

Depth adjustment In 2.25mm
Out 2.25mm

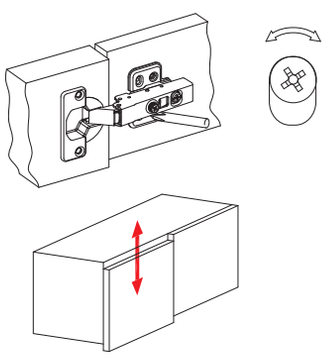

Height adjustment Up 2.0mm
Down 2.0mm

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

Model	Spec.		Screws		Knock-in Dowels	
						
Overlay	Spec	Figure	Hole Pattern	Model No.	Hole Pattern	Model No.
18mm			52mm	9256-0121-NZ3	52mm	9256-0131-NZ3
9mm			52mm	9256-0122-NZ2	52mm	9256-0132-NZ2
0mm			52mm	9256-0123-NZ4	52mm	9256-0133-NZ4

Base Plates for Hinge

Spec.			Material	Finish	Model No.
 			Steel	Nickel-plated	207
  			Steel / Plastic	Nickel-plated	208
 			Steel	Nickel-plated	209
 			Steel	Nickel-plated	210
 			Steel	Nickel-plated	212

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9215 Snap-on Hinges 105°

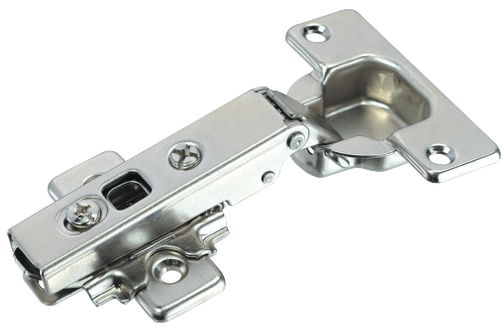

Specifications

- **Cup Diameter:** 35mm
- **Cup Depth:** 12mm
- **Opening:** 105°
- **Finish:** Nickel-plated
- **Material**: Cold rolled steel
- **Packing:** 200 pcs/carton
- **Overlay:** 19mm, 16mm, 9mm, 5mm, 0mm

	Spec.		Screws		Knock-in Dowels	
						
Overlay			Hole Pattern	Model No.	Hole Pattern	Model No.
19mm			52mm	9215-0121-NZH	52mm	9215-0131-NZH
			48mm	9215-0321-NZH	48mm	9215-0331-NZH
			45mm	9215-0221-NZH	45mm	9215-0231-NZH
16mm			52mm	9215-0125-NZH	52mm	9215-0135-NZH
			48mm	9215-0325-NZH	48mm	9215-0335-NZH
			45mm	9215-0225-NZH	45mm	9215-0235-NZH
9mm			52mm	9215-0122-NZH	52mm	9215-0132-NZH
			48mm	9215-0322-NZH	48mm	9215-0332-NZH
			45mm	9215-0222-NZH	45mm	9215-0232-NZH
5mm			52mm	9215-0124-NZH	52mm	9215-0134-NZH
			48mm	9215-0324-NZH	48mm	9215-0334-NZH
			45mm	9215-0224-NZH	45mm	9215-0234-NZH
0mm			52mm	9215-0123-NZH	52mm	9215-0133-NZH
			48mm	9215-0323-NZH	48mm	9215-0333-NZH
			45mm	9215-0223-NZH	45mm	9215-0233-NZH

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

Base Plates for Hinge

Spec.		Spacing	Material	Finish	Order No.
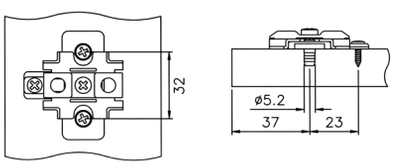		0mm	Steel	Nickel-plated	146
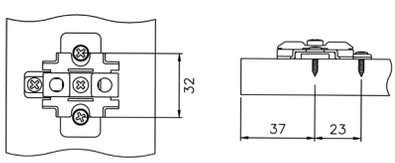		0mm	Steel	Nickel-plated	143
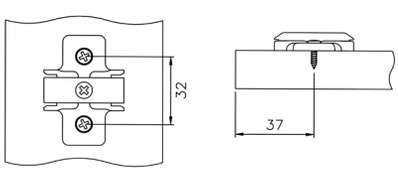		0mm	Steel	Nickel-plated	150
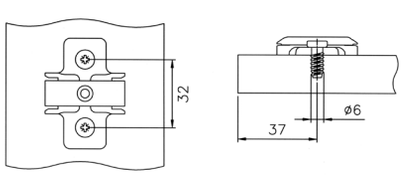		0mm	Steel	Nickel-plated	151
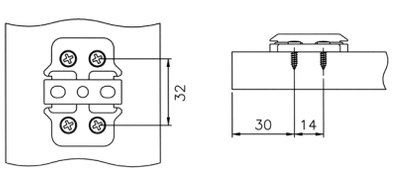		0mm	Steel	Nickel-plated	159
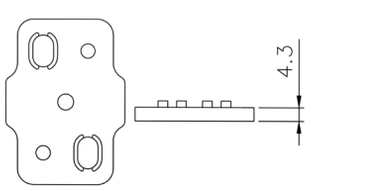		3mm	Plastic		GP921601BG-AAS
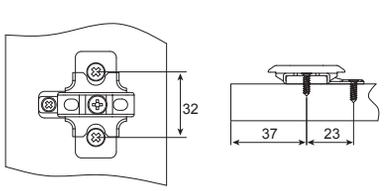		0mm	Steel	Nickel-plated	201
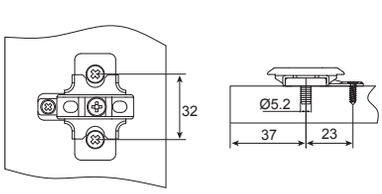		0mm	Steel	Nickel-plated	213

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9255

- 3-tier soft-close adjustment

6 Way Adjustable Soft Close Face-Framed Hinge

King Slides 6-way adjustable soft close hinges can be easily activated by a switch. This innovative design provides 3-tier soft -close adjustments for users' preference. Its quiet soft close feature makes the face framed cabinetry more convenient and elegant. With the 6-way fine-tuning adjustments the installation became easy and effortless. King Slide is dedicated to continuous creation of various products to enhance better life quality you deserve.

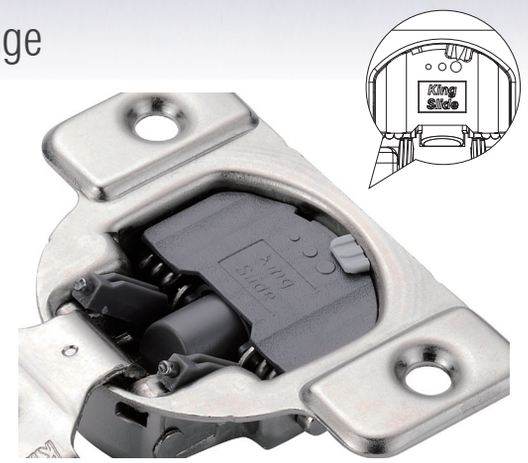

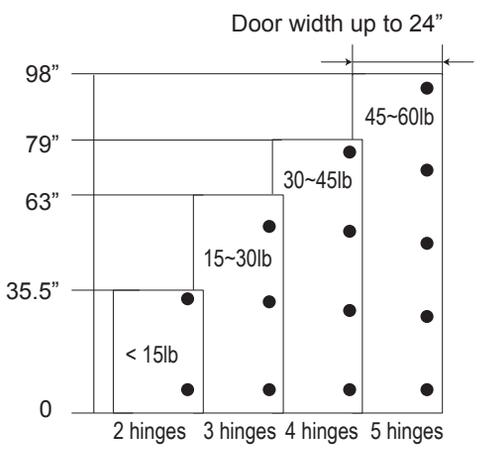

Hinge Q'ty	2	3	4	5
Load Capacity	<15lbs	15~30lbs	30~45lbs	45~60lbs

Minimum Reveal

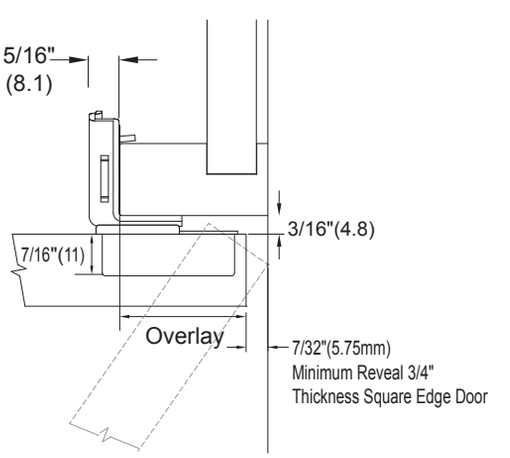

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9255-A2 Partial Overlay Hinges

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 5/16" (7.9mm), 3/8" (9.5mm), 7/16" (11.1mm), 1/2" (12.7mm), 9/16" (14.3mm), 5/8" (15.9mm), 3/4"(19.1mm)

Dimension

Unit: inch (mm)

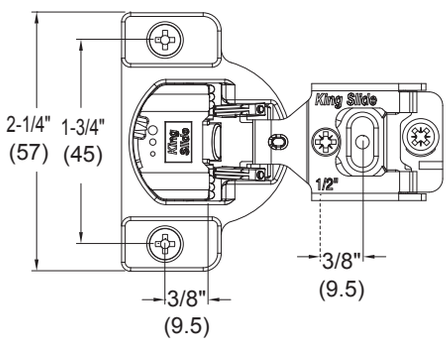

Boring Pattern

Unit: inch (mm)

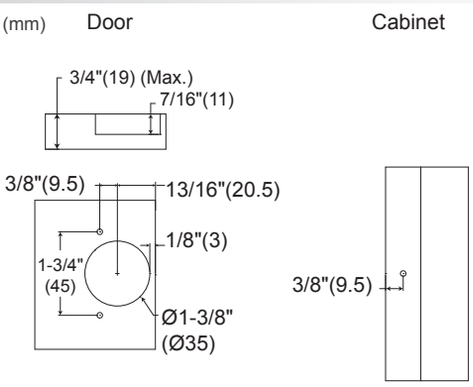

Door Overlay

Unit: inch (mm)

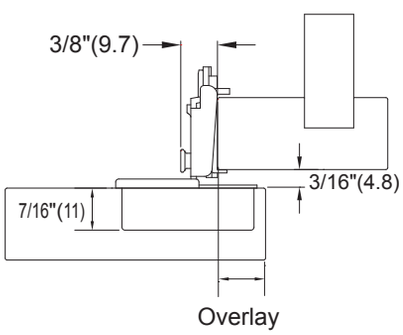





Item No.	Screws (Without Dowel)	Knock-in Dowes
9255-A2		
Overlay inch (mm)	**Model No.**	**Model No.**
5/16" (7.9)	9255-A22E-NZH.554C	9255-A23E-NZH.554C
3/8" (9.5)	9255-A22F-NZH.554C	9255-A23F-NZH.554C
7/16" (11.1)	9255-A22G-NZH.554C	9255-A23G-NZH.554C
1/2" (12.7)	9255-A22H-NZH.554C	9255-A23H-NZH.554C
*1/2" (12.7)	9255-A22H-NZH.552C	9255-A23H-NZH.552C
9/16" (14.3)	9255-A22I-NZH.554C	9255-A23I-NZH.554C
5/8" (15.9)	9255-A22J-NZH.554C	9255-A23J-NZH.554C
3/4" (19.1)	9255-A22L-NZH.554C	9255-A23L-NZH.554C

* Available as edge mount hinge

Assembly and Adjustments



Side adjustment L 3/32"(2.5mm) R 3/32"(2.5mm)

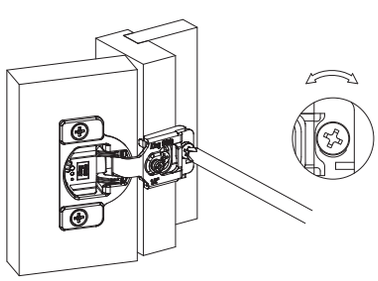

Depth adjustment In 1/32"(0.5mm) Out 3/32"(2.5mm)

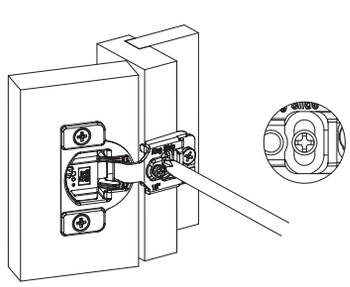

Height adjustment Up 1/8"(3mm) Down 1/8"(3mm)







King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9255-B2 Full Overlay Hinges

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 1" (25.4mm), 1-1/4" (31.7mm), 1-5/16" (33.3mm), 1-3/8"(34.9 mm)1-7/16" (36.5mm), 1-1/2" (38.1mm) , 1-9/16" (39.7mm)
- **Minimum Reveal:** 17/64"(6.75mm)

Dimension

Unit: inch (mm)

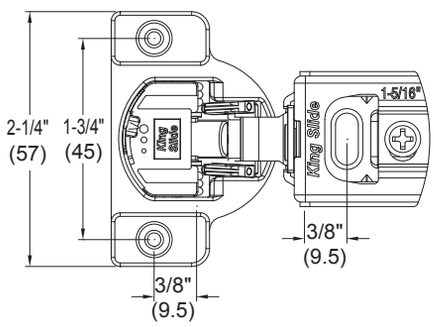

Boring Pattern

Unit: inch (mm)

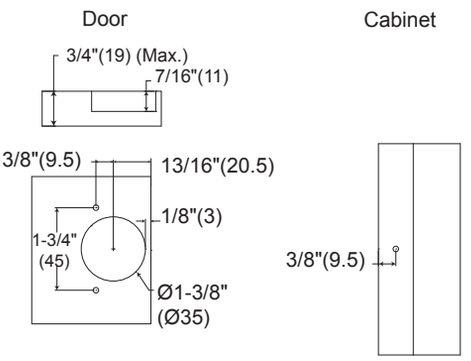

Door Overlay

Unit: inch (mm)

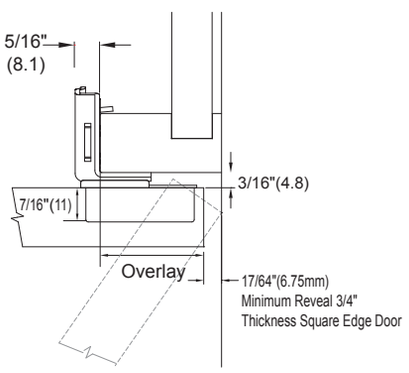

Item No.	Screws (Without Dowels)	Knock-in Dowels
9255-B2		
Overlay inch (mm)	Model No.	Model No.
1" (25.4mm)	9255-B22P-NZH.553C	9255-B23P-NZH.553C
1-1/4" (31.7mm)	9255-B22D-NZH.553C	9255-B23D-NZH.553C
1-5/16" (33.3mm)	9255-B22E-NZH.553C	9255-B23E-NZH.553C
1-3/8" (34.9mm)	9255-B22F-NZH.553C	9255-B23F-NZH.553C
1-7/16" (36.5mm)	9255-B22G-NZH.553C	9255-B23G-NZH.553C
1-1/2" (38.1mm)	9255-B22H-NZH.553C	9255-B23H-NZH.553C
1-9/16" (39.7mm)	9255-B22I-NZH.553C	9255-B23I-NZH.553C

Assembly and Adjustments

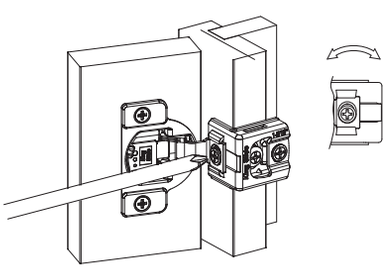

Side adjustment L 1/16" (1.5mm) R 1/16" (1.5mm)





Depth adjustment In 1/32"(0.5mm) Out 3/32"(2.5mm)





Height adjustment Up 1/8"(3mm) Down 1/8"(3mm)



King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9255-C2 Full Overlay Hinges

(four way adjustments)

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 1-3/8" (34.9mm) or greater

Dimension

Unit: inch (mm)

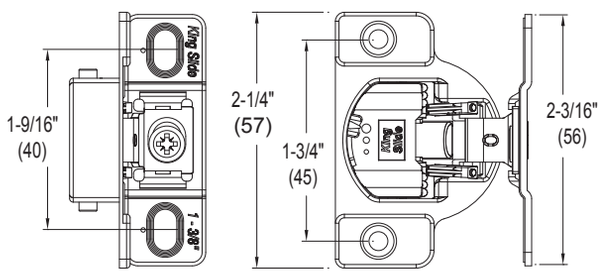

Boring Pattern

Unit: inch (mm)

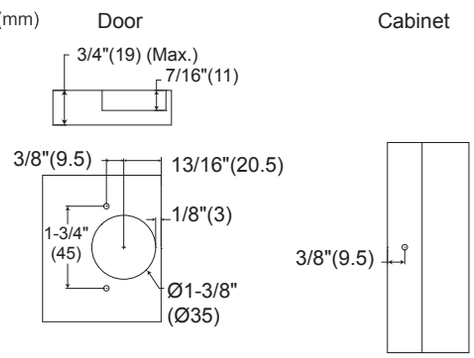

Door Overlay

Unit: inch (mm)

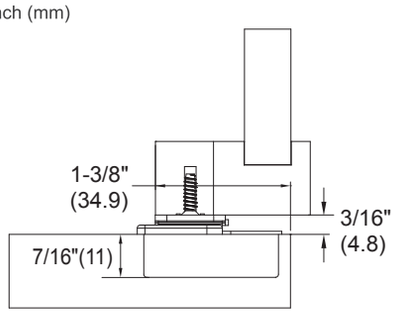

Item No.	Screws (Without Dowle)	Knock-in Dowels
9255-C2		
Overlay inch (mm)	Model No.	Model No.
1-3/8" (34.9mm)	9255-C22F-NZH.551C	9255-C23F-NZH.551C

Assembly and Adjustments

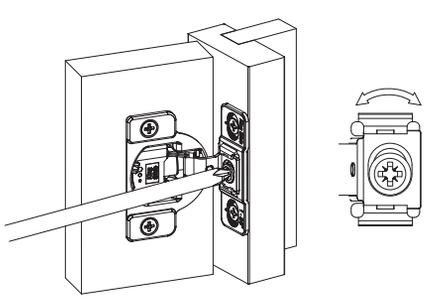

Side adjustment L 1/16"(1.5mm)
R 1/16"(1.5mm)

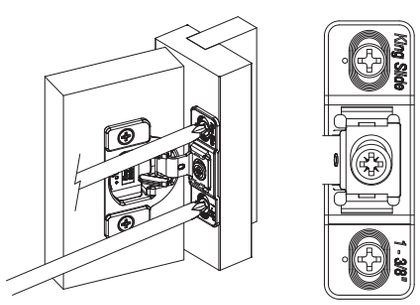

Height adjustment Up 5/64" (2mm)
Down 5/64" (2mm)





King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.

9255-E2 Full Overlay Hinges

- **Cup Diameter:** 35mm(1-3/8")
- **Cup Depth:** 11mm (7/16")
- **Opening:** 105 °
- **Finish:** Nickel-plated
- **Material:** Cold rolled steel
- **Overlay:** 1" (25.4mm), 1-1/4" (31.7mm), 1-5/16" (33.3mm), 1-3/8"(34.9 mm) ,1-7/16" (36.5mm), 1-1/2" (38.1mm) , 1-9/16" (39.7mm)
- **Minimum Reveal:** 7/32"(5.75mm)

Dimension

Unit: inch (mm)

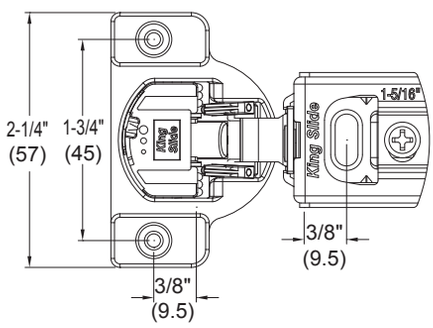

Boring Pattern

Unit: inch (mm)

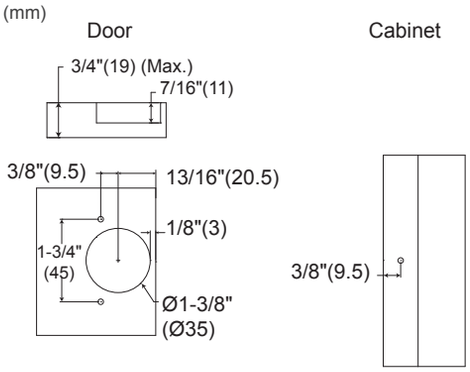

Door Overlay

Unit: inch (mm)

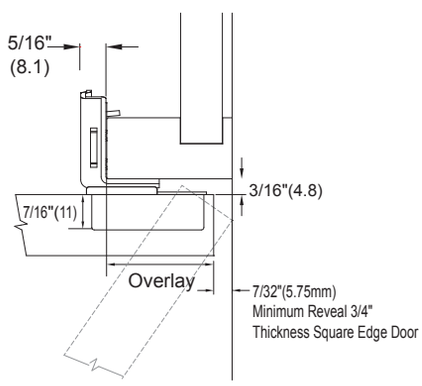

Item No.	Screws (Without Dowels)	Knock-in Dowels
9255-E2		
Overlay inch (mm)	Model No.	Model No.
1" (25.4mm)	9255-E22P-NZH.553C	9255-E23P-NZH.553C
1-1/4" (31.7mm)	9255-E22D-NZH.553C	9255-E23D-NZH.553C
1-5/16" (33.3mm)	9255-E22E-NZH.553C	9255-E23E-NZH.553C
1-3/8" (34.9mm)	9255-E22F-NZH.553C	9255-E23F-NZH.553C
1-7/16" (36.5mm)	9255-E22G-NZH.553C	9255-E23G-NZH.553C
1-1/2" (38.1mm)	9255-E22H-NZH.553C	9255-E23H-NZH.553C
1-9/16" (39.7mm)	9255-E22I-NZH.553C	9255-E23I-NZH.553C

Assembly and Adjustments



Side adjustment L 3/32" (2.5mm)
R 3/32" (2.5mm)



Depth adjustment In 1/32"(0.5mm)
Out 3/32"(2.5mm)



Height adjustment Up 1/8"(3mm)
Down 1/8"(3mm)







King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.